


The HMi 470-Z1



Fully Certified

Certified to ATEX, IECEx, AEx (NEC505) Section 18 CSA 22,2 EAC.

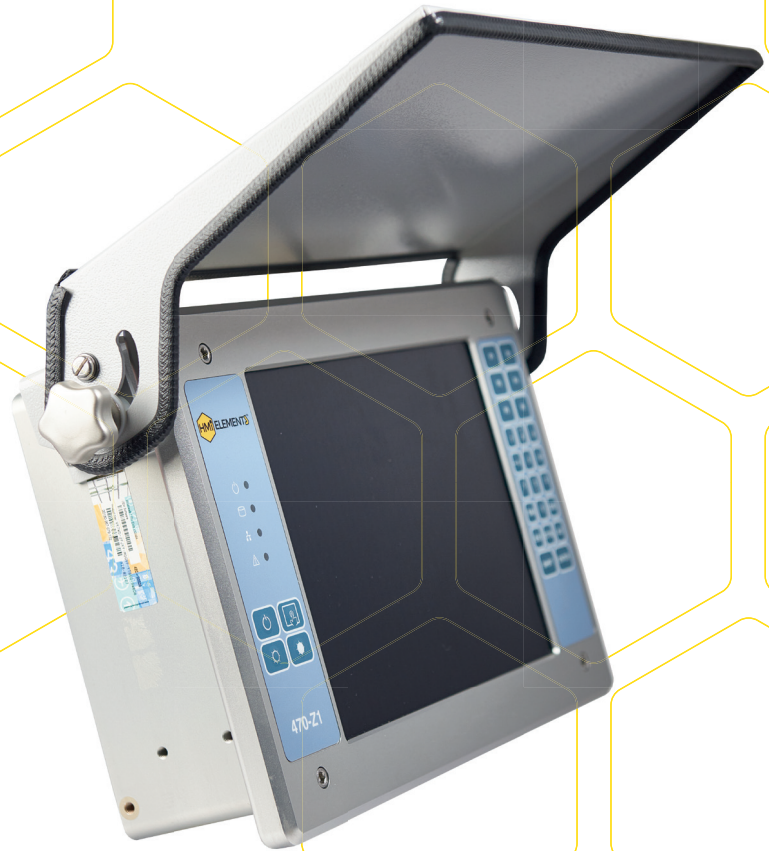

Lightweight

Weighing in at 33lb/15kg.



Crisp & Bright Display

Sunlight readable PCT display.



Versatile Mounting options

Choice of mounting & connector options Yoke, VESA and Panel mounting. Rear or bottom mounted connectors.

PRODUCT TYPE	PC Workstation / Driller's Display Unit (DDU)
MODEL NO	470-Z1
TYPICAL EX CODE	II (2) GD Ex e mb ib [ib] IIC T4 Gb (Gb) Ex tb IIIB T135°C Dc IP66 Class I, Zone 1, AEx e mb ib [ib] IIC T4 Gb (Gb) Zone 21 Ex tb IIIB T135°C Db IP66
DISPLAY SIZE	12.1" LCD panel with LED backlight display
DISPLAY TYPE	Projected Capacitive Technology (PCT) - Multi Touch, Glove Friendly
RESOLUTION	1024 x 768
PROCESSOR	Quad Core N Series 1.83GHz
OPERATING SYSTEM	Windows 10 Enterprise LTSB, Windows 7 Professional
STORAGE	64GB - 128GB mSATA SSD
MEMORY	4GB DDR3 SDRAM
ETHERNET OPTIONS	(optional) Copper Ethernet port 10/100/1000 Mbps Base-T (optional) Fibre Optic port via Omnitron media converter
WI-FI / BLUETOOTH	2.4 GHz Wi-Fi (802.11 b/g/n) Bluetooth V2
KEYBOARD / MOUSE	(optional) Intrinsically Safe PS/2 Interface
USB	Internal USB port for Safe area (optional) External USB type 2.0 port via ROTA DR4 connector
INGRESS PROTECTION	IP66 / NEMA4X
OPERATING TEMPERATURE	-40°C to +60°C (-40°F to +140°F)
STORAGE TEMP	-40°C to +80°C (-40°F to +176°F)
HUMIDITY	10 to 90 % non-condensing, operating 0 to 100 % non-operating
WEIGHT	< 33lbs / 15kg
DIMENSIONS	W 385 x H 260 x D 116mm; 15.2 x 10.2 x 4.6 inches
SHOCK & VIBRATION	Shock: In accordance with BS EN60068-2-27:2009 Vibration: In accordance with BS. EN60068-2-6:2008



Exloc Instruments UK Ltd,
Unit 7,
Riverside Court,
Delph,
OL3 5FZ

Tel: 01457 239301
sales@exloc.co.uk