

# Aegex100M™ Intrinsically Safe Tablet


**Aegex Technologies' 2nd Generation intrinsically safe tablet offers improved safety** in several key measurements, and increased performance with enhanced memory and expanded storage. Operating in the most hazardous industries with explosive environments, Aegex solutions bring real-time connectivity to help organizations harness the power of data to optimize efficiency.



Oil and Gas



Chemical

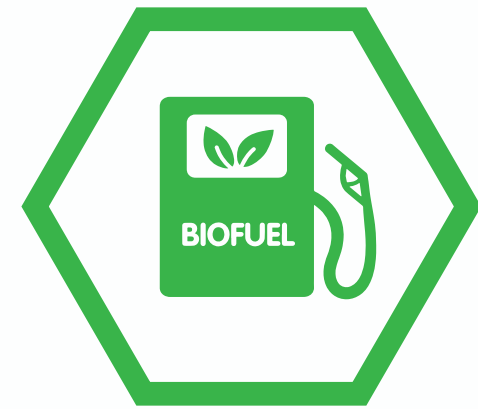

Biofuel



Pharmaceutical



Paints &  
Specialty Coatings



Food &  
Beverage

**The Aegex100M™ Intrinsically Safe Tablet is positioned to be the most advanced, efficient, and rugged Windows tablet**, with pending Zone 0 / Division 1 certification in hazardous areas. Simple to deploy, it is the basis for an Industrial Internet of Things platform for hazardous industries, allowing operations to easily begin their digital transformation to Industry 4.0

## Purpose-Built Intrinsically Safe

Designed from the ground up to be the lightest and fastest Windows device in its class, the Aegex100M is currently pending certification for ATEX/IECEX Zone 0 and UL 913 Class I, II, III, Division 1.

## Hazardous Area Mobility

At the center of hazardous area mobility, the Aegex100M supports all of your operational needs including: Maintenance, Inspections, Workflow Management, Automation & Process Control, MES, Diagnostics & Calibration, HMI, Asset Management and many more.

## Enterprise Class Solutions

Safely and securely connect your hazardous area operations and allow your teams to share mission-critical data across the entire organization; enabling greater visibility, collaboration, decision making, and performance.



### Pending Certification for:

ATEX / IECEx Zone 0  
UL913 C I, II, III Div 1

- 10.1" AHVA Display
- Powered by Intel Quad-Core Apollo Lake Processor
- 8GB RAM



**aegex.com**



## SPECIFICATIONS

### Submitted for the following Intrinsically Safe Certifications

In certification for Zone 1 & Zone 0 certification according to ATEX, IECEx, and UL 913 standards. Following are the planned certifications:

#### UL 913 8th Edition, CSA C22.2 No. 60079-0 & -11

Class I, II, III, Division 1, Groups A-G, T4  
Tamb = -20°C...+50°C, IP67

#### IECEx

Ex ia IIC T4 Gb  
Ex ia IIIC T135°C Db  
Tamb = -20°C...+50°C, IP67

#### ATEX

II 2G Ex ia IIC T4 Gb  
II 2D Ex ia IIIC T135°C Db  
Tamb = -20°C...+50°C, IP67

### Exterior

W x H x D: 278 x 207 x 13.8 mm (10.94 x 8.15 x 0.54 in) - without battery  
W x H x D: 278 x 207 x 28.3 mm (10.94 x 8.15 x 1.11 in) - at battery section

Estimated final weight: 1400g (3.08 lbs)

### Display

10.1" / 25.6 cm AHVA display  
WQXGA (2560 x 1600 px)  
Contrast 1000:1 (min.: 800:1)  
Brightness 540 NITs  
Viewing angle (up/down, left/right) 170°  
16.7M colors

### Battery

7.4V, 6500mAh, 48.1Wh  
Rechargeable Lithium Cobalt Oxide

### Charging Time (In standby)

Wall adaptor: 0-90% in 2.5hours, to 100% in approx. 3.5 hours  
Docking station: 0-90% in 2.5hours, to 100% in approx. 3.5 hours

### CPU & Storage

Intel® Quad-Core Apollo Lake processor  
Base: 1.6GHz, Burst 1.8GHz  
8GB RAM, 256GB storage  
MicroSDXC Card Slot (up to 2 TB cards supported)

### Wireless & LTE

WiFi 802.11 a/b/g/n/ac/r/k/v/w/hc/ax  
Bluetooth 5.2 + HS  
LTE: Supported Bands TBD  
NFC



### Location

GPS / GLONASS / Galileo  
(Cold start <30s, Hot start < 2s)

### Connections

Magnetic pin connector for rapid charging with Aegex Wall Charger  
Docking connector supports LAN, USB 2.0, 3.0, USB-C, HDMI, SD Card, and audio jack

### Software

Windows 10 IoT Enterprise  
AegexScan Application - Optional

### Video & Audio

Main Camera (rear-facing): 8MP Auto-focus with flash  
Image: 3264 x 2448 px jpg, video: 1080p (Full HD 1920 x 1080) 30 fps

Secondary Camera (Front-facing)  
Image: 1920 x 1080 px jpg, video: 1080p (FullHD 1920x1080) 30 fps

2 digital microphones (Front/Back), front facing microphone array.  
Stereo speakers

### Sensors

Ambient light sensor (ALS), Accelerometer, Gyroscope, E-Compass, SAR proximity sensor

### Security

Intel® TXE Boot Guard 2.0  
FW TPM (Intel® PTT3)  
Intel® Trusted Execution Engine Interface (Intel® TXEI) Driver  
Intel AES New Instructions  
BitLocker

### In the Box

Aegex100M™ intrinsically safe tablet  
Wall charger (12VDC 3.5A power supply and adaptor)

To request a demo or to talk to a product specialist, please contact our nearest office or go to:

[www.aegex.com](http://www.aegex.com)

#### UNITED STATES

**Headquarters (Atlanta)**

**Phone: +1 (470) 242-4000**

**Email: [contact@aegex.com](mailto:contact@aegex.com)**

#### EUROPE

**Sales (Netherlands)**

**Phone: +31 10 808 0408**

**Email: [contact@aegex.com](mailto:contact@aegex.com)**

#### EUROPE

**Sales (United Kingdom)**

**Phone: +44 14 184 60479**

**Email: [contact@aegex.com](mailto:contact@aegex.com)**

 [@aegextech](https://twitter.com/aegextech)

 [contact@aegex.com](mailto:contact@aegex.com)

