

X1-DUM-01

Dummy Module

The Dummy Module X1-DUM-01 can replace any unit belonging to the X1 Series, offering protection towards the board connectors. This product requires a dedicated Termination Board.

FEATURES


- Installation in Zone 2 / Division 2

ORDERING INFORMATION

Ordering codes

X1-DUM-01

OVERALL DIMENSIONS

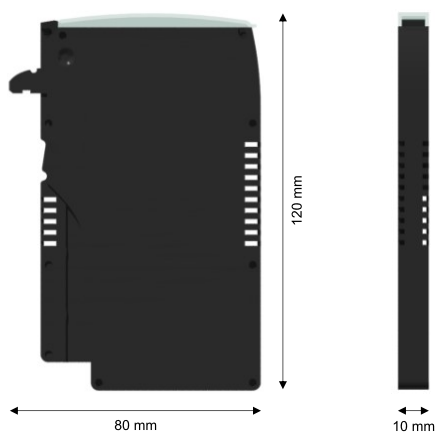

TECHNICAL DATA

Environmental conditions

Operating temperature: temperature limits -40 to $+70$ °C.

Storage temperature: temperature limits -45 to $+80$ °C.

Mounting

On custom Termination Board.


Weight: about 20 g.

Dimensions: Width 10 mm, Depth 80 mm, Height 120 mm.

FUNCTION DIAGRAM

Hazardous Area

Safe Area/Zone 2/Div. 2

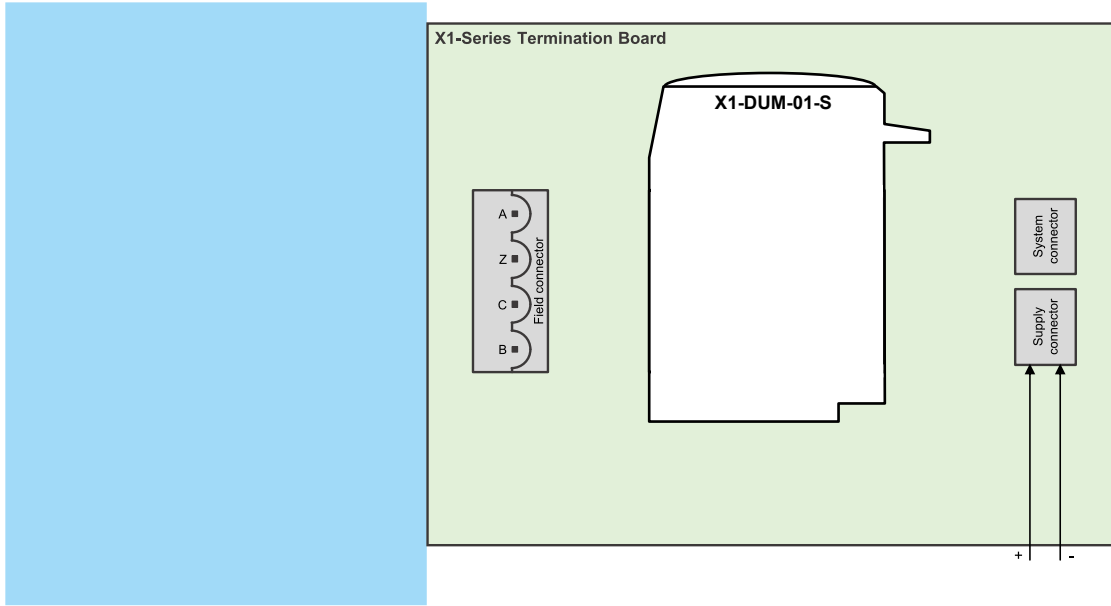

*null

Temp. TMP0056 Rev.1

www.gminternational.com



Functional Safety Management Certification:
GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to instruction manual.